



ASY Electronics (Jiaxing) Co., Ltd

Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and
Technological Development Zone, Jiaxing , Zhejiang P.R. China

Passive wireless temperature sensor

KL-DS30WS3A

Manual





ASY Electronics (Jiaxing) Co., Ltd

Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and
Technological Development Zone, Jiaxing , Zhejiang P.R. China

Table of contents

I. Product overview	1
II. Structure of wireless temperature measurement system	2
2.1 Wireless temperature measurement system structure diagram...	2
2.2 Schematic diagram of wireless temperature 2.....	2
2.3 Function introduction	3
III. Main technical parameters	4
IV. Installation site case	5
V. Contact us	6



ASY Electronics (Jiaxing) Co., Ltd

Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and Technological Development Zone, Jiaxing , Zhejiang P.R. China

I、 Product Overview

passive wireless temperature sensor is a single-channel, high-precision passive temperature sensor composed of a temperature sensor, signal modulation and amplification device, logic control circuit, wireless communication circuit, and antenna. This temperature sensor uses CT induction power extraction technology, making it suitable for most temperature measurement scenarios with appropriate current connections. It requires no external power supply or battery power, offering significant advantages in terms of product stability and ease of installation compared to externally powered temperature sensors which are difficult to deploy and to battery-powered sensors which are susceptible to the impact of ambient temperature on their lifespan.

This temperature sensor features single-channel temperature detection and uses a strap-on mounting method, allowing direct contact with the object being measured for easy and secure installation. It employs ultra-low-power wireless communication, transmitting the collected three-channel temperature data to a wireless temperature measurement host via a wireless network. The product is primarily deployed in applications such as low-voltage switchgear.



ASY Electronics (Jiaxing) Co., Ltd


Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and Technological Development Zone, Jiaxing , Zhejiang P.R. China


II、Wireless temperature measurement system structure

2.1 Wireless Temperature Measurement System Structure Diagram

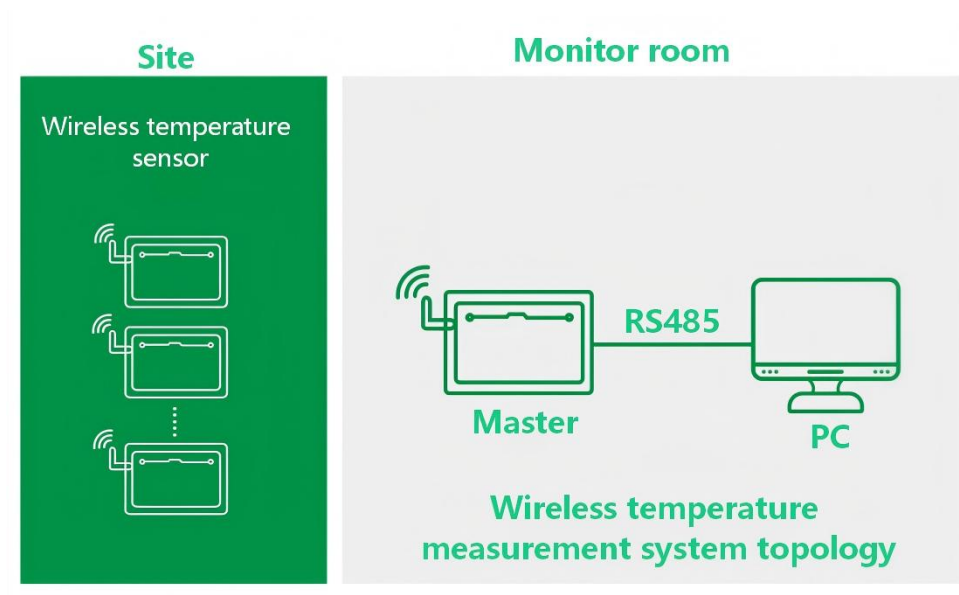

2.2 Schematic diagram of wireless temperature sensor

Principle and structure of wireless temperature measurement sensor

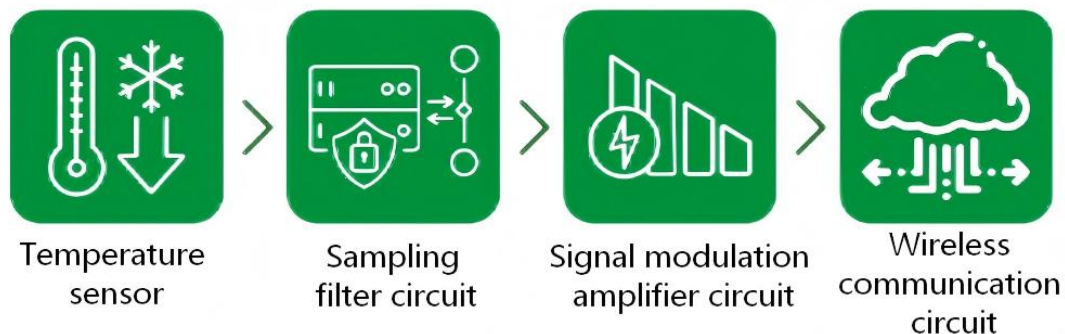



ASY Electronics (Jiaxing) Co., Ltd

Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com


Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and Technological Development Zone, Jiaxing , Zhejiang P.R. China

2.3 Function Introduction

Main functions	Function Introduction
Temperature detection function	Real-time detection of the current temperature of the measured part
Power supply voltage self-test function	Real-time detection of the sensor's own power supply voltage value
Power is drawn from induced current	The sensor is powered by electromagnetic induction of primary side current.
Note: All data detected by the sensors are uploaded to the wireless temperature measurement host via wireless transmission.	



III、 Main technical parameters

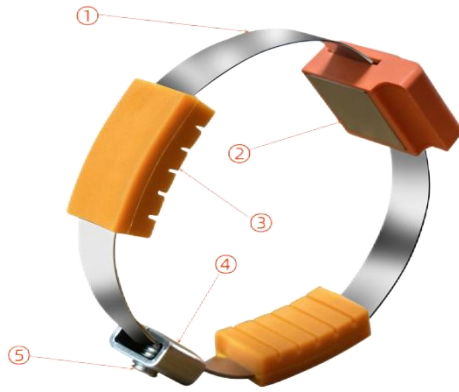

Sensor structure:

- ① Power-collecting alloy sheet: used for inductive power collection
- ② Back cover: Sensing temperature
- ③ Soft silicone: Increases connection strength
- ④ Connector: Connects single-piece double-ended connectors.
- ⑤ Screws: Secure the power-collecting plate

parameter	Temperature measurement range: -40 ~ 150 °C
	Measurement accuracy: $\pm 1^{\circ}\text{C}$
	Temperature sampling frequency: 10~30 seconds (random) by default
	Wireless frequency: 433MHz
	Wireless transmission distance: ≥ 350 meters (open space)
	Operating power: Inductive power , induced current greater than 3A
	Starting current: < 5A
	Voltage level requirement for sensor installation location: $\leq 220\text{KV}$
	Primary current requirement for sensor installation location: $\leq 5000\text{A}$ (For currents
	Installation method: Bundled
	Main body dimensions: 24 mm * 22 mm * 10 mm
Install Part	Removable high-voltage switchgear: busbars, stationary contacts, cable connections, etc. Low-voltage switchgear: outgoing terminals, circuit breaker input and output terminals. Tubular busbars, copper busbars, substation terminals, etc.
	Fixed high-voltage switchgear: busbars, isolating switches, cable connections, etc.
	Low-voltage switchgear: circuit breaker inlet, outlet, cable outlet, etc.



ASY Electronics (Jiaxing) Co., Ltd

Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and Technological Development Zone, Jiaxing , Zhejiang P.R. China

Installation steps	 Step 1: Estimate the length of the installation location and insert the appropriate length through the module; insert the power-collecting plate and soft silicone into the sensor (with the corrugated side of the soft silicone facing down, aligned with the temperature sensing position). Step 2: Wrap the module around the power source (main current path) so that the temperature measuring point contacts the part to be measured, and tighten the alloy plates on both sides; then overlap the two ends under the clips. Tighten the screws with an Allen wrench.
--------------------	---

IV、 Installation site case





ASY Electronics (Jiaxing) Co., Ltd

Business inquiries: +86 181 5734 3325

E-mail: sales@king-sen.com Website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road, Economic and Technological Development Zone, Jiaxing , Zhejiang P.R. China

V、Contact us



Business Phone: 18157343325 Lila Xu

Technical Phone: 18057302496 Wailly Yang

E-mail: sales@king-sen.com

Office website: www.asyjx.com

Address: Room 302, Building 11, No. 79 Jinsui Road,
Economic and Technological Development Zone,
Jiaxing , Zhejiang P.R. China

*This information product images and technical data is for reference only, if subject to update without prior notice, the specific content of the right to interpret ASY Electronics (Jiaxing) Co., Ltd.